

# VERTICAL GLASS DRILLING MACHINE VSV100



FEROPROFIL



- ▶ Vertical double sided glass drilling machine VSV100 allows operator to drill holes into sheet glass from 3 to 100mm diameter. The machine is equipped with drill spin regulator for fluent regulation of drill bits, motorized lifting bar with digital measuring of the vertical position and wheel knob for easy adjusting of vertical position of the loading bar.
- ▶ Tilting pressure board and tilting pressure ring allows the operator to change the drill bits of both drilling head from the front side of the machine, which saves the space and time of the operator.
- ▶ The biggest advantage of glass drilling machine VSV100 is perpendicular drilling the sheet glass with unique mechanism for drilling with both drilling heads operated by ergonomic handle. Drill bits stop position can be adjusted also from the front side of the machine, just above the control panel. Lifting bar is equipped with ruler and locking stop points from both sides for adjusting exact extent – great for serial production.
- ▶ Max. length from drill bit center and lowest position of the loading bar is 900mm, which allows you to drill larger sheets of the glass. Modified support frame can be ordered per customers request.



## Technical information:


➤ Motor	1,1 kW , 550 – 1400 rpm.
➤ Power supply	3x400 V (1x230 V, 3x 230V) 50/60 Hz
➤ Drilled glass	
➤ thickness	3 - 20mm
➤ Drill bits diameter	3 - 100mm
➤ Length of the drill bit	75mm
➤ Glass depth	900mm
➤ Minimal dimension	
➤ of the drilled glass	110 x 50mm
➤ Weight	380 kg
➤ Finishing	komaxid + galvanized zinc
➤ Dimension (WxHxD)	2100 x 2000 x 960mm



## Accessories:

- DIGITAL MEASURING LOADING BAR
- SIDE STOP POINTS
- HEIGHT EXTENSION OF SUPPORT FRAME

For videos and photos visit our website [www.feroprofil.com](http://www.feroprofil.com)

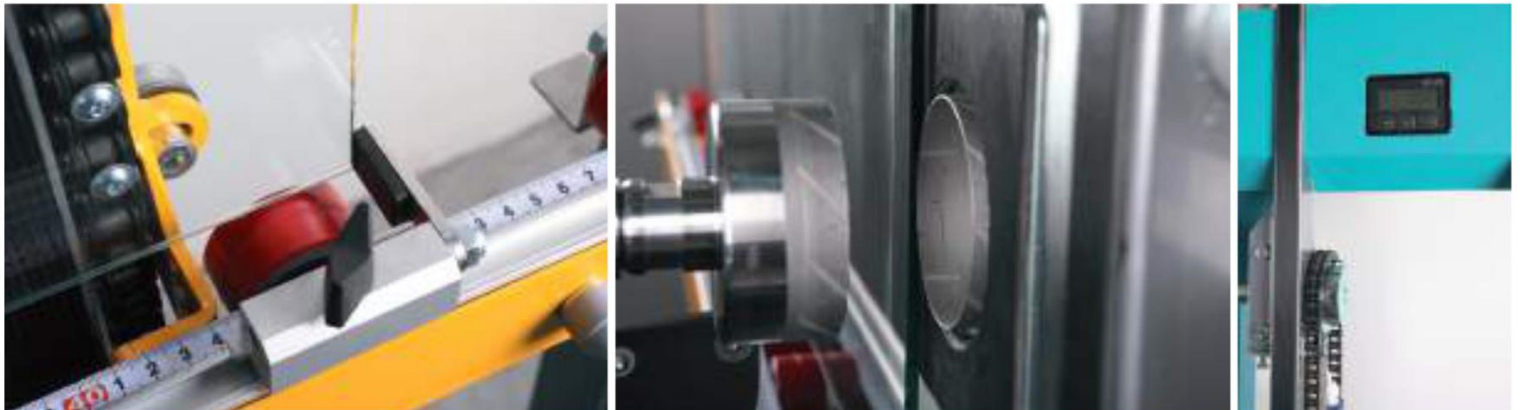

FEROPROFIL s.r.o.

Libosváry 73 | 768 61, Bystřice pod Hostýnem

IČO: 05789541 | DIČ: CZ05789541

info@feroprofil.cz | +420 739 921 359



FEROPROFIL